

(19) World Intellectual Property
Organization
International Bureau



551 529

(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088075 A1

(51) International Patent Classification⁷: **E05F 15/12**

(21) International Application Number:
PCT/FI2004/000167

(22) International Filing Date: 25 March 2004 (25.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20030495 2 April 2003 (02.04.2003) FI

(71) Applicant (for all designated States except US): **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KOPONEN, Arto** [FI/FI]; Vaiviontie 181a, FI-83430 Käsämä (FI).

(74) Agent: **AWEK INDUSTRIAL PATENTS LTD OY**, P.O. Box 230, (Lautatarhankatu 6), FI-00101 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **ARRANGEMENT IN A SWING DOOR APPARATUS FOR THE DETECTION OF DOOR POSITION**

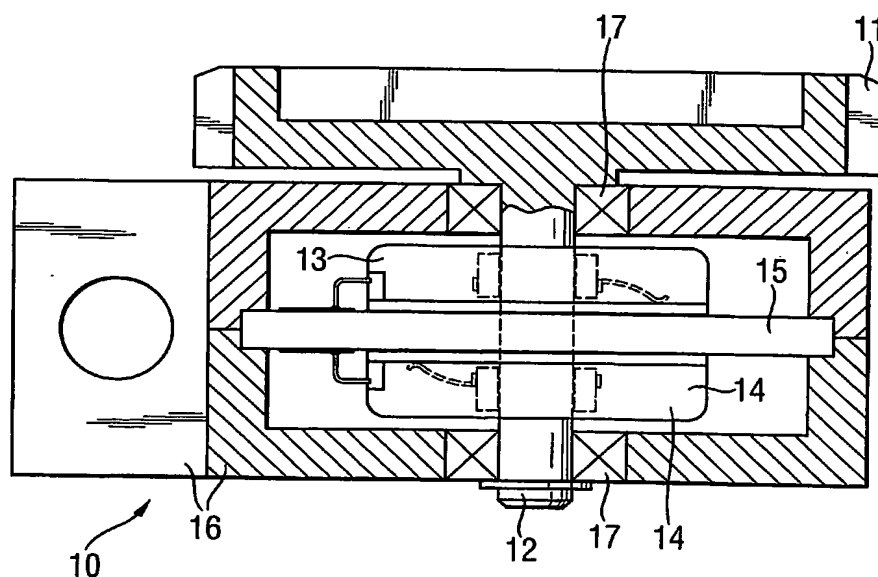

(57) Abstract: An arrangement in a swing door apparatus for the detection of door position, which swing door apparatus comprises an operation shaft (5), the turning of which follows the door movements. The detection of door position is arranged to be provided by potentiometric means (13, 14) or the like, which have at least substantially identical characteristic curves and which are arranged operatively dependent on the turning angle of said operation shaft (5).

WO 2004/088075 A1